

PROJECT NAME:	TYPE:
DATE:	
SPECIFIER:	
PART NO.:	PREPARED BY:



LED FESTOON TRACK SYSTEM

The LED Festoon Track System can be used for all types of installations, cove lighting, decorative, jewelry case, etc. This system is light weight and can be installed in various locations with ease. The product is durable, long lasting, and cool to the touch. Fits with all standard LED festoon lamps. A versatile product; sockets can be removed and replaced in desired increments.




UL 2108; UL 1598, CSA C22.2#9.0,*

FEATURES AND BENEFITS

- Festoon track of white with chrome lamp clips from 1 to 5 meters
- Standard socket spacing (1 7/8")
- Sockets of chrome place spring steel
- Two styles of junction boxes: Standard and Low Profile
- Use with Class II certified power supplies
- Field cuttable


JUNCTION BOXES, TRACK & SOCKETS

STANDARD JUNCTION BOX

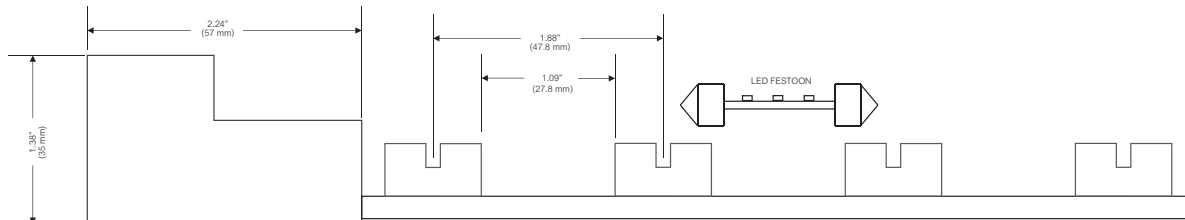


Standard size junction box, for Class II installation in dry locations. With standard 1/2" knockout this junction box can be used with almost all applications.*

END VIEW (ACTUAL SIZE)

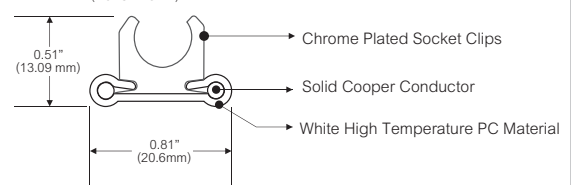

LOW PROFILE JUNCTION BOX

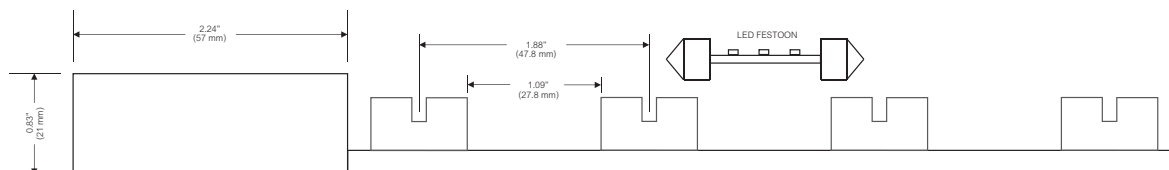

A low profile junction box can be used in applications where space is limited. The low profile junction box is still rated for Class II in dry locations.

* Both styles of junction box to be used with approved power supplies.

*UL 2108; Issue:2004/02/27 Ed:1 Rev:2011/04/27 UL Standard for Safety Low Voltage Lighting Systems; UL1598; Issue:2008/09/17 Ed:3 Luminaires; General Instruction No.1 2010/01/11; CSA C22.2#9.0, Issue: 1996/05/15 Ed.1 Rev:2011/07/27 General Requirements for Luminaires - (Reaffirmed 2011)

PROJECT NAME:	TYPE:
DATE:	
SPECIFIER:	
PART NO.:	PREPARED BY:



LED FESTOON TRACK SYSTEM

ORDERING GUIDE

Examples:

TBD-3-STD = Festoon Track, Standard Junction Box, 3M (9.84')

TBD-5-LOW = Festoon Track, Low Profile Junction Box, 5M (16.4')



SERIES

LENGTH

1M (3.28')

2M (6.5')

3M (9.8')

4M (13.1')

5M (16.4')

JUNCTION TYPE

STD

LOW

POWER SUPPLIES

USE WITH LED LAMPS ONLY:


Any commercially available Class II, low voltage magnetic power supply, up to 5A for either 12V or 24V in AC or DC current.

DIMMERS

USE WITH LED LAMPS ONLY:

Any commercially available low voltage magnetic dimmer, up to 5A for either 12V or 24V in AC or DC current.

OPTIONAL ACCESSORIES

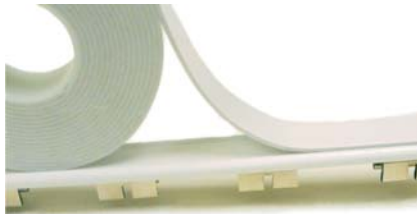

Double sided tape, applied to track in field



Straight Mounting Clip

MOUNTING OPTIONS

- double sided mounting tape (applied directly to track, in field)
- straight mounting clip applied in increments of 12" (in field)

PART #:	DESCRIPTION
TBD-FTAPE	Double Sided, 1/2" Mounting Tape
TBD-SMC	Straight Line Mounting Clip
TBD-CAP	End Cap

LED FESTOON LAMPS



LED Festoon Lamps to be ordered separately.

For LED Festoon Lamps, see TBD LED Festoon data sheet.

The product is durable, long lasting, and cool to the touch. Fits with all standard festoon sockets. These solid-state lighting devices are environmentally friendly, low temperature, and high light output. See the TBD LED Festoon data sheets to choose the one that is right for your application.