


PROJECT NAME:	DATE:	TYPE:
SPECIFIER:	PREPARED BY:	
PART NO.:		



LED POWER SUPPLIES

TBD.PSDH

HIGH PERFORMANCE DC DIMMING DRIVER

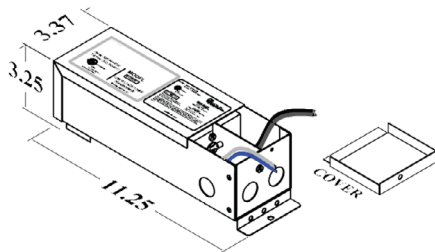

TBD.PSDH-48W-24V
TBD.PSDH-96W-24V

11.25 in. x 3.375 in. x 3.25 in.

TBD.PSDH is available in 24V DC for use with MLV forward phase dimming systems. Suitable for commercial or residential use. Integrated technology ensures LED's are not overdriven. Offered in two sizes, for wet or dry locations. UL listed, Class 2 rated.

FEATURES

- Made in the USA
- Pure DC Current Technology
- AC Ripple Technology – ensures LED's are not overdriven due to repeated excessive current
- NEMA 3R wet location Indoor / Outdoor Enclosure
- Manual reset overload protection
- 100,000 hours lifetime rating
- Aluminum heat dissipating housing
- Dimmable with MLV forward phase dimmers
- UL listed
- Class 2 rated
- Ambient operating temp: 22° ~ +140°F
- Storage temperature: 85° to 194°F
- Humidity: up to 100%



ORDERING GUIDE

TBD.PSDH —

WATTAGE

48W-24V - 48 Watt
96W-24V - 96 Watt